

FlexiShield

Paint Protection Film



PRODUCT PORTFOLIO

May 2025

United Kingdom Edition

A brand of:



100% US manufactured.
Developed and tested under the scorching Arizona sun.





About FlexiShield


Established in Los Angeles, California, USA in 2012, **Reflek Technologies Corporation** is a world-class manufacturer and distributor of high-performance finishes and coatings for the construction and transportation industries. Our product portfolio is centered on integrated climatic technologies such as solar control window films, DC vacuum sputtering and specialized precision coatings, photovoltaics and flexible circuit applications.

FlexiShield, trademarked in 2014, is Reflek's brand of Paint Protection Films and Solar Control Window Films for automotive, marine, and architectural applications. All FlexiShield products are manufactured at our own state-of-the-art facility in Phoenix, Arizona, USA, produced out of US-made raw materials, thoroughly developed under strict lab conditions, and field-tested under the harsh Arizona sun.

What is paint protection film?

Paint protection film (PPF) provides critical exterior protection from harsh weather, staining, and exposure to extreme road conditions. Its TPU material is exceptionally tough and durable, and possesses a "self-healing" property that allows it to return to its original shape if scratched or distressed.

Because of its superior technology and in-house manufacturing FlexiShield is the ultimate choice in PPF, and remains the established preference for the most demanding car owners and installers.

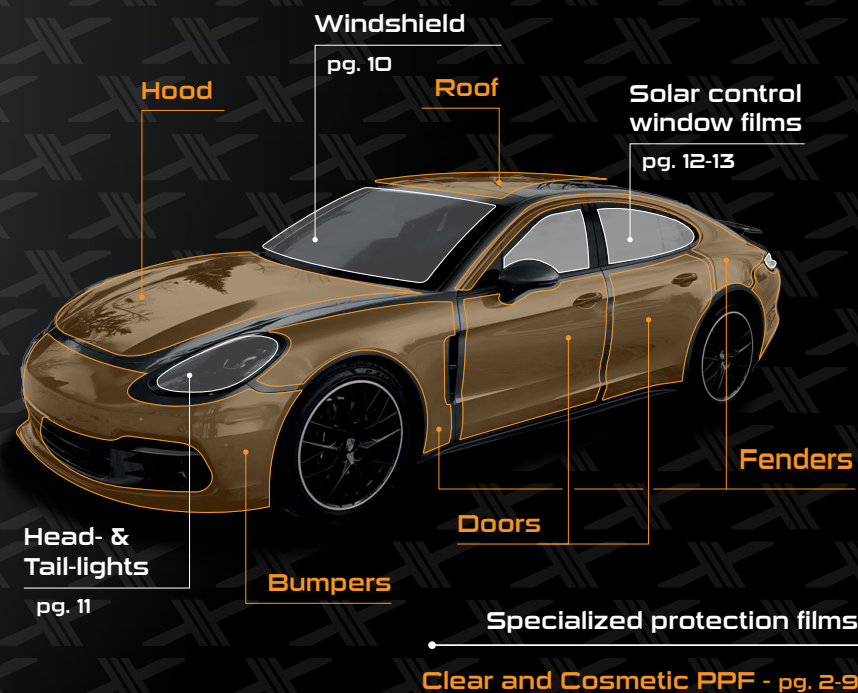

10.0

FlexiShield's solution for off-road vehicles and supercars

The pinnacle of automotive defense: FlexiShield's 10.0mil (254μ) Paint Protection Film (PPF) is engineered to safeguard supercars and high-performance vehicles against the harshest road (and off-road) conditions, protecting your high-value investment while allowing you to drive it as it was meant to be driven.

Beyond its protective prowess, this 10.0mil PPF maintains optical clarity, preserving the aesthetic appeal of your vehicle's paintwork. Its advanced self-healing properties effortlessly erase minor abrasions, ensuring a flawless surface at all times. With enhanced UV resistance, this film safeguards against yellowing, fading, and discoloration. Whether navigating city streets or conquering off-road trails, this armor-like film offers peace of mind to enthusiasts and professionals alike.



Purpose-engineered,
heavy-duty protection.



Premium-grade TPU,
invulnerable to yellowing,
fading, and cracking.



Flexible construction,
adaptable to complex
geometry despite its
thickness.



10.0mil (254μ) TPU
Glossy reinforced
12-year warranty

DPH SPECIFICATIONS

Total Thickness	10.0 mil (254 μ)*	PCE Thickness Gauge
Top Coat	0.5 mil (13 μ)	
Polyurethane Film	8.5 mil (216 μ)*	
Adhesive	1.0 mil (25 μ)	

UV Accelerating Test - 3000 Hours, 105°F - Pass
(Equivalent to 5 years)

TPU Haze (Clarity) Δ	1.20 %	ASTM D1003-1 Original 0.8
Yellowing Δ	< 1.20 %	ASTM D1925-70
Self Healing Δ	Pass	Lab Testing
Cold Slam - Cracking or Peeling	Pass	TPJLR.52.055
Elongation (at break MD)	>325 %	ASTM 6775-13
Stain Resistance (Unleaded gasoline, Kerosene)	No cosmetic defects	Lab Testing
20° Gloss (stainless steel surface)	>96 GU	Gloss Meter 20°
Chip Resistance Gravelometer	No damage on paint	ASTM D3170

	449.0 N/m	41 oz/in	20 minutes at room temperature
Peel	481.0 N/m	44 oz/in	24 hours at room temperature
Adhesion	514.0 N/m	47 oz/in	1 week at room temperature
180 Degree Peel	689.0 N/m	63 oz/in	1 week at 160°F/70°C
1.0 mil coating	765.0 N/m	70 oz/in	1 week at 95°F/ 35°C, 95% RH
Paint Surface			

* Thickness tolerance: Maximum +/- 8%. Data provided by TPU manufacturer.



WSH Pro

FlexiShield's top line clear Paint Protection Film

At 8.5mil (216 μ) thickness, WSH Pro is one of the thickest PPF's on the market. Its hyper-glossy surface finishing will satisfy the wishes of the most demanding customers, while its well-balanced adhesive and precisely-engineered flexibility facilitates the perfect install each and every time.

FlexiShield Paint Protection products are self-healing and heat curable because of a flexible component in the thermoplastic polyurethane (TPU) film. WSH Pro is thicker than its standard counterpart, offering an industrious enhancement to the incredible protection you can already expect from FlexiShield's diverse product array.



Unparalleled top-coat gloss.



Perfectly-balanced adhesive and film flexibility.



Premium thickness and transparency.

WSH Pro SPECIFICATIONS

Total Thickness	8.5 mil (216 μ)*	PCE Thickness Gauge
Top Coat	0.5 mil (13 μ)	
Polyurethane Film	7.0 mil (178 μ)*	
Adhesive	1.0 mil (25 μ)	

UV Accelerating Test - 3000 Hours, 105°F - Pass
(Equivalent to 5 years)

TPU Haze (Clarity) Δ	1.00 %	ASTM E1003-1 Original 0.8
Yellowing Δ	< 0.80 %	ASTM D1925-70
Self Healing Δ	Pass	Lab Testing
Cold Slam - Cracking or Peeling	Pass	TPJLR.52.055
Elongation (at break MD)	>360 %	ASTM 6775-13
Stain Resistance (Unleaded gasoline, Kerosene)	No cosmetic defects	Lab Testing
20° Gloss (stainless steel surface)	>96 GU	Gloss Meter 20°
Chip Resistance Gravelometer	No damage on paint	ASTM D3170

	449.0 N/m	41 oz/in	20 minutes at room temperature
Peel Adhesion	481.0 N/m	44 oz/in	24 hours at room temperature
180 Degree Peel	514.0 N/m	47 oz/in	1 week at room temperature
1.0 mil coating	689.0 N/m	63 oz/in	1 week at 160°F/70°C
Paint Surface	765.0 N/m	70 oz/in	1 week at 95°F/ 35°C, 95% RH

* Thickness tolerance: Maximum +/- 8%. Data provided by TPU manufacturer.

8.5mil (216 μ) TPU
Hyper-glossy
12-year warranty

WSH

Protect your valued assets with FlexiShield WSH

FlexiShield's 8,0mil (203μ) thick WSH PPF is engineered to provide all-around surface protection for high-value cars, yachts, architectural interiors, and many other personal and commercial assets. FlexiShield WSH has been formulated for optimum self-healing performance, durability, and versatility of installation.

With a decade of field testing under all weather conditions - from the scorching Arizona desert to the frozen fjords of Norway - FlexiShield WSH remains the go-to option for the most discerning PPF installers.



Well-balanced, all-around protection.



Optimum thickness and flexibility for the broadest versatility of installation.



Over one decade of field testing.



8.0mil (203μ)
High-gloss
10-year warranty

WSH SPECIFICATIONS

Total Thickness	8.0 mil (203 μ)*	PCE Thickness Gauge
Top Coat	0.5 mil (13 μ)	
Polyurethane Film	6.5 mil (165 μ)*	
Adhesive	1.0 mil (25 μ)	

UV Accelerating Test - 3000 Hours, 105°F - Pass
(Equivalent to 5 years)

TPU Haze (Clarity) Δ	1.20 %	ASTM D1003-1 Original 0.8
Yellowing Δ	< 1.20 %	ASTM D1925-70
Self Healing Δ	Pass	Lab Testing
Cold Slam - Cracking or Peeling	Pass	TPJLR.52.055
Elongation (at break MD)	>350%	ASTM 6775-13
Stain Resistance (Unleaded gasoline, Kerosene)	No cosmetic defects	Lab Testing
20° Gloss (stainless steel surface)	>96 GU	Gloss Meter 20°
Chip Resistance Gravelometer	No damage on paint	ASTM D3170

	449.0 N/m	41 oz/in	20 minutes at room temperature
Peel Adhesion	481.0 N/m	44 oz/in	24 hours at room temperature
180 Degree Peel	514.0 N/m	47 oz/in	1 week at room temperature
1.0 mil coating	689.0 N/m	63 oz/in	1 week at 160°F/70°C
Paint Surface	765.0 N/m	70 oz/in	1 week at 95°F/ 35°C, 95% RH

* Thickness tolerance: Maximum +/- 8%. Data provided by TPU manufacturer.

MAT

FlexiShield MAT's elegant satin look

FlexiShield's MAT PPF provides 8,0mil (203μ) of paint protection and an understated, muted look to a vehicle's finish. MAT film also enjoys the same self-healing top-coat and chemical properties as its glossy FlexiShield counterparts.

To self-heal, a combination of hard and soft co-polymers react to rebind and retain their surface finish. With FlexiShield MAT you can enjoy a smooth, satin overlay that highlight's your vehicle's geometry, and brings out a new quality to any painted or textured surface.



Deep satin look
which enhances
the car's lines.



Full TPU protection
and self-healing.



Lab- and field-tested
under the harshest
conditions.

MAT SPECIFICATIONS

Total Thickness	8.0 mil (203 μ)*	PCE Thickness Gauge
Top Coat	0.5 mil (13 μ)	
Polyurethane Film	6.5 mil (165 μ)*	
Adhesive	1.0 mil (25 μ)	

UV Accelerating Test - 3000 Hours, 105°F - Pass
(Equivalent to 5 years)

TPU Haze (Clarity) Δ	2.00 %	ASTM D1003-1 Original 0.8
Yellowing Δ	< 2.40 %	ASTM D1925-70
Self Healing Δ	Pass	Lab Testing
Cold Slam - Cracking or Peeling	Pass	TPJLR.52.055
Elongation (at break MD)	>350 %	ASTM 6775-13
Stain Resistance (Unleaded gasoline, Kerosene)	No cosmetic defects	Lab Testing
20° Gloss (stainless steel surface)	Satin	Gloss Meter 20°
Chip Resistance Gravelometer	No damage on paint	ASTM D3170

	449.0 N/m	41 oz/in	20 minutes at room temperature
Peel	481.0 N/m	44 oz/in	24 hours at room temperature
Adhesion	514.0 N/m	47 oz/in	1 week at room temperature
180 Degree Peel	689.0 N/m	63 oz/in	1 week at 160°F/70°C
1.0 mil coating	765.0 N/m	70 oz/in	1 week at 95°F/ 35°C, 95% RH
Paint Surface			

* Thickness tolerance: Maximum +/- 8%. Data provided by TPU manufacturer.



8.0mil (203μ) TPU
Satin
8-year warranty



STH

FlexiShield's mass-market PPF solution

Because premium protection doesn't need to come at a high price, FlexiShield's STH PPF is a 7.5mil (191μ) thick film engineered and tested for ease of installation and an optimum price-to-performance value on standard vehicles, vessels, and furniture.

With an 8-year warranty on automotive applications, FlexiShield STH will protect private and commercial vehicles throughout their entire expected service-life. It is invulnerable to yellowing, fading, and cracking, and will retain its self-healing properties and gloss in all weather and road conditions.



High-grade film at a competitive price.



Same top-coat and base-coat materials as our top lines.



Great protection and gloss.



7.5mil (191μ) TPU
Glossy
8-year warranty

STH SPECIFICATIONS

Total Thickness	7.5 mil (191 μ)*	PCE Thickness Gauge
Top Coat	0.5 mil (13 μ)	
Polyurethane Film	6.0 mil (153 μ)*	
Adhesive	1.0 mil (25 μ)	

UV Accelerating Test - 3000 Hours, 105°F - Pass
(Equivalent to 5 years)

TPU Haze (Clarity) Δ	1.60 %	ASTM D1003-1 Original 0.8
Yellowing Δ	< 1.80 %	ASTM D1925-70
Self Healing Δ	Pass	Lab Testing
Cold Slam - Cracking or Peeling	Pass	TPJLR.52.055
Elongation (at break MD)	>340 %	ASTM 6775-13
Stain Resistance (Unleaded gasoline, Kerosene)	No cosmetic defects	Lab Testing
20° Gloss (stainless steel surface)	>96 GU	Gloss Meter 20°
Chip Resistance Gravelometer	No damage on paint	ASTM D3170

	449.0 N/m	41 oz/in	20 minutes at room temperature
Peel Adhesion	481.0 N/m	44 oz/in	24 hours at room temperature
180 Degree Peel	514.0 N/m	47 oz/in	1 week at room temperature
1.0 mil coating	689.0 N/m	63 oz/in	1 week at 160°F/70°C
Paint Surface	765.0 N/m	70 oz/in	1 week at 95°F/ 35°C, 95% RH

* Thickness tolerance: Maximum +/- 8%. Data provided by TPU manufacturer.



PTM

FlexiShield's Basic Hazard Protection

Because every vehicle deserves protection, FlexiShield has developed its new BHP PPF. Featuring FlexiShield's exceptional top-coat and adhesive, on a more commercial-level TPU base-layer than our STH, WSH, WSHPro, and DPH lines. FlexiShield BHP is our answer to provide excellent protection for all every-day cars, utility vehicles, and commercial fleets.

FlexiShield BHP is a 7.5mil (191μ) thick film which features a dense top-coat for a harder surface, and a better stain and damage resistance. This film can take a beating and still be restored with its built-in thermal self-healing properties.



Engineered for heavy-duty, working vehicles, and commercial fleets.



Built with materials selected for their optimum price-to-performance value.



Flexible and easy to install for an enhanced shop workflow.

BHP SPECIFICATIONS (GLOSSY & SATIN)

Total Thickness	7.8 mil (198 μ)*	PCE Thickness Gauge
Top Coat	0.5 mil (13 μ)	
Polyurethane Film	6.3 mil (160 μ)*	
Adhesive	1.0 mil (25 μ)	

UV Accelerating Test - 3000 Hours, 105°F - Pass (Equivalent to 5 years)

TPU Haze (Clarity) Δ	1.60 %	ASTM D1003-1 Original 0.8
Yellowing Δ	< 2.20 %	ASTM D1925-70
Self Healing Δ	Pass	Lab Testing
Cold Slam - Cracking or Peeling	Pass	TPJLR.52.055
Elongation (at break MD)	>340 %	ASTM 6775-13
Stain Resistance (Unleaded gasoline, Kerosene)	No cosmetic defects	Lab Testing
20° Gloss (stainless steel surface)	>94 GU	Gloss Meter 20°
Chip Resistance Gravelometer	No damage on paint	ASTM D3170

	449.0 N/m	41 oz/in	20 minutes at room temperature
Peel Adhesion	481.0 N/m	44 oz/in	24 hours at room temperature
180 Degree Peel	514.0 N/m	47 oz/in	1 week at room temperature
1.0 mil coating	689.0 N/m	63 oz/in	1 week at 160°F/70°C
Paint Surface	765.0 N/m	70 oz/in	1 week at 95°F/ 35°C, 95% RH

* Thickness tolerance: Maximum +/- 8%. Data provided by TPU manufacturer.

7.8mil (198μ) TPU Glossy/Satin
Imported Base TPU
7-year warranty



Cosmetic

FlexiShield - The state-of-the-art in Color PPF

FlexiShield's breakthrough in dry-apply, auto-paint-resin-integrating, full-TPU Cosmetic PPF technology has rendered it the global leader in color-changing PPF for the most demanding customers. Ranging from 7.5 to 8.5mil (191-216 μ) thicknesses, FlexiShield's Cosmetic PPF is currently available in nearly 100 unique and exclusive colors, both glossy and satin. From flat shades to high-metallic, pearlescent color-changing, and rainbow textures, there is a dream choice for everyone in FlexiShield's color catalogue.

CL | Clear Coat



HG | High Glitter



DM | Color Flip



SP | Special Styles



TP | Texture Pattern



- 7.5-8.5mil (191-216 μ)
- TPU Glossy/Satin
- 5(10)-year warranty (see details on page 17)



COSMETIC

FlexiShield - The state-of-the-art in Color PPF

FlexiShield Cosmetic Paint Protection products are made with 100% TPU, with an integrated welded layer of authentic auto-paint resin for the unmistakable color depth and shimmer of real car paint. FlexiShield's Cosmetic PPF features the same premium TPU top-coat as our clear PPF's, and provides the same unparalleled protection, self-healing, and hydrophobicity as its clear counterparts.



Unique finishing and color depth.



Constantly expanding color & finishing range.



Full 100% TPU PPF protection.



Resistant to fading under all weather conditions.

7.5-8.5mil (191-216μ) TPU
Glossy/Satin
5(10)-year warranty
 (see details on page 17)

COSMETIC PPF SPECIFICATIONS

Color Category	CL	HG	DM	SP	TP
Total Thickness	7.5 mil (191 μ)*	8.0 mil (203 μ)*	8.5 mil (216 μ)*	8.0 mil (203 μ)*	8.5 mil (216 μ)*
Top Coat	0.5 mil (13 μ)				PC
Polyurethane Film	5.5 mil (140 μ)*				Thick
Adhesive	1.2 mil (30 μ)				Ga

UV Accelerating Test - 3000 Hours, 105°F - Pass
 (Equivalent to 5 years)

TPU Haze (Clarity) Δ	1.0%	ASTM E1003-1 Original 0.8
Yellowing Δ	<0.8%	ASTM D1925-70
Self Healing Δ	Pass	Lab Testing
Cold Slam - Cracking or Peeling	Pass	TPJLR.52.055
Elongation (at break MD)	>340%	ASTM 6775-13
Stain Resistance (Unleaded gasoline, Kerosene)	No cosmetic defects	Lab Testing
20° Gloss (stainless steel surface)	>96 GU	Gloss Meter 20°
Chip Resistance Gravelometer	No damage on paint	ASTM D3170

	449.0 N/m	41 oz/in	20 minutes at room temperature
Peel Adhesion	481.0 N/m	44 oz/in	24 hours at room temperature
180 Degree Peel	514.0 N/m	47 oz/in	1 week at room temperature
1.0 mil coating	689.0 N/m	63 oz/in	1 week at 160°F/70°C
Paint Surface	765.0 N/m	70 oz/in	1 week at 95°F/ 35°C, 95% RH

* Thickness tolerance: Maximum +/- 8%.
 Data provided by TPU supplier.



DFR Pro

Protecting your windshield from the road

DFR Pro is FlexiShield's newly-released, 100% TPU windshield protection film. At 5.0mil (128 μ) thickness, and produced with an extra-hard topcoat entirely free of orange peel, FlexiShield DFR Pro is the most optically transparent, hydrophobic, and easy-to-install windshield protection film on the market *.

FlexiShield's DFR Pro is available in standard and Lite transparency levels. Standard DFR Pro is recommended for high performance cars, while DFR Pro Lite will provide full protection and incredible transparency for all standard and commercial vehicles.

* For best results, a PPF-dedicated ceramic coating must be applied to the film after installation, and thereafter every 6 months.



Exceptional transparency and surface finishing.



Easy installation in under 10 minutes.



100% optical-grade TPU.

DFR Pro SPECIFICATIONS

Total Thickness	5.0 mil (128 μ)	PCE Thickness Gauge
Top Coat	0.5 mil (13 μ)	
Polyurethane Film	4.0 mil (102 μ)	
Adhesive	0.5 mil (13 μ)	

UV Accelerating Test - 3000 Hours, 105°F - Pass
(Equivalent to 5 years)

	DFR Pro	DFR Pro Lite	
TPU Haze (Clarity) Δ	0.8%	1.4%	ASTM E1003-1 Original 0.8
Yellowing Δ	<0.9%	<0.9%	ASTM D1925-70
Self Healing Δ	Pass	Pass	Lab Testing
Cold Slam - Cracking or Peeling	Pass	Pass	TPJLR.52.055
Elongation (at break MD)	>275%	>260%	ASTM 6775-13
Stain Resistance (Unleaded gasoline, Kerosene)	No cosmetic defects	No cosmetic defects	Lab Testing
Surface Hardness	6H	6H	ASTM D3363
Chip Resistance Gravelometer	No Penetration	No Penetration	ASTM D3170

	149.0 N/m	14 oz/in	20 minutes at room temperature
Peel Adhesion	160.0 N/m	15 oz/in	24 hours at room temperature
180 Degree Peel	171.0 N/m	16 oz/in	1 week at room temperature
1.0 mil coating	230.0 N/m	21 oz/in	1 week at 160°F/70°C
Paint Surface	255.0 N/m	23 oz/in	1 week at 95°F/ 35°C, 95% RH



5,0mil (128 μ) TPU
Optical
12-month warranty

Headlight performance meets luxury

FlexiShield's HDL headlight protection film provides a light, sporty shade to your head- and tail-lights, while minimally affecting their intensity, contrast, and color temperature. With a thickness of 6.5mil (165µ), and a 100% TPU composition, FlexiShield HDL protects your lights from impact and scratch marks, while also virtually eliminating fading and yellowing caused by solar or chemical exposure.

Available in 35% and 50% Visible Light Transmittance (VLT), and featuring a warm gray tone, FlexiShield HDL adds the perfect combination between racing performance and luxury, providing the final aesthetic touch to your car, while protecting your lights from the hazards of the road.



Minimum light interference



Perfect match between elegance and performance



Protection from impact, scratching, and fading

HDL SPECIFICATIONS

Total Thickness	6.5 mil (165 µ)	PCE Thickness Gauge
Top Coat	0.5 mil (13 µ)	
Polyurethane Film	5.0 mil (127 µ)	
Adhesive	1.0 mil (25 µ)	

UV Accelerating Test - 120°F - Pass

TPU Haze (Clarity) Δ after 3,000 hours	1.6%	ASTM D1003-1 Original 0.8
Yellowing Δ after 1,200 hours	<1.2%	ASTM D1925-70
Self Healing Δ after 3,000 hours	Pass	Lab Testing
Cold Slam - Cracking or Peeling	Pass	TPJLR.52.055
Elongation (at break MD)	>340%	ASTM 6775-13
Stain Resistance (Unleaded gasoline, Kerosene)	No cosmetic defects	Lab Testing
20° Gloss (stainless steel surface)	>96 GU	Gloss Meter 20°
Chip Resistance Gravelometer	No damage on paint	ASTM D3170

	449.0 N/m	41 oz/in	20 minutes at room temperature
Peel Adhesion	481.0 N/m	44 oz/in	24 hours at room temperature
180 Degree Peel	514.0 N/m	47 oz/in	1 week at room temperature
1.0 mil coating	689.0 N/m	63 oz/in	1 week at 160°F/70°C
Paint Surface	765.0 N/m	70 oz/in	1 week at 95°F/ 35°C, 95% RH

6.5mil (165µ) TPU
Light-transmitting
3-year warranty

SOLAR CONTROL WINDOW FILMS

FlexiShield's cutting-edge window films for all your solar control needs!

Our premium collection features ceramic, metallic, hybrid, and dip dyed films to match every level of performance and budget. Whether it's your car, home, office, or yacht we've got you covered! Experience superior protection, improved energy efficiency, and a sleek look with FlexiShield. Elevate your comfort and style while keeping the sun's rays at bay.

FS series | Multilayer nano ceramic coating

Nano-ceramic coating to provide exceptional solar control, with perfect optical clarity and reduced glare.

- ◆ Dye- and metal-free composite film invulnerable to color fading or shade changes.
- ⚙️ Exceptional IR protection (88% to 96%) and 99% UV protection.
- 📶 Non-metallic construction for a zero-interference protection layer which does not affect cell-phone, radio, and GPS signals
- 🔋 Energy-efficient, blocking most of the solar heat from entering your vehicle. For a comfortable, safe, and energy-efficient driving experience.

1,5mil 2ply (FS 70 = 3,0mil). VLT's 10 to 70. Life-time warranty.

GT series | Carbon Ceramic

Keeps your interior cool and private while blocking heat

- ◆ Nano-carbon technology with a distinct carbon color and impressive performance,
- ⚙️ Excellent IR protection (74% to 80%) and 99% UV rejection.
- 🛡️ Invulnerable to color fading or shade changes due to its color-stable composition.
- 📶 Non-metallic construction for a zero-interference protection layer which does not affect cell-phone, radio, and GPS signals.
- 💰 Energy-saving and cost-effective, for a comfortable and safe driving experience.

1,5mil 2ply – VLT's 05 to 80. Life-time warranty.



SOLAR CONTROL WINDOW FILMS



Life-time warranty.



Engineered
application-specific
performance.



Designed, manufactured,
and tested under the
scorching Arizona sun.

CH series | Sputtering Metal & Fade-free Colour-stable Dye

Keeps your interior cool and private while blocking heat



Hybrid construction with one layer of dye and one layer of metallic-sputtered protection.



Total Solar Energy Rejection TSER (43% to 60%) and 99% UV protection.



Non-reflective dip-dyed look with the color-stability, solar control and extra-durability of metallic-sputtered protection.



Energy-saving and cost-effective, for a comfortable and safe driving experience.

1,5mil 2ply. VLT's 05 to 80. Life-time warranty.

PR series | Non-fading Color Stable Dip Dyed

The perfect balance between performance and affordability.



Double-layered dip-dyed film for a longer service life and performance.



Total Solar Energy Rejection TSER (30% to 45%) and 99% UV protection.



Non-reflective appearance.



Non-metallic construction for a zero-interference protection layer which does not affect cell-phone, radio, and GPS signals



Energy-saving and cost-effective, for a comfortable and safe driving experience.

1,0mil 1ply. VLT's 07 to 70. Life-time warranty.



RAP 2.0

Streamline your workflow with FlexiShield's free-access pre-cut software.

FlexiShield's RAP 2.0 pre-cut software is provided free of charge to FlexiShield installers, based on a credit system of 25 credits (25m² cutting area) per standard PPF roll.

Over the years, RAP 2.0 has built a robust car database including American, European, and Asian models. New models are added daily, and can be prioritized on request. RAP 2.0 offers a number of advanced user functionalities such as part offsetting, emblem toggling, part labeling, and material optimization.




Free access to FlexiShield customers.



Large and expanding database of US, EU, and Asian cars.



Complete customization to meet specific installer requirements.

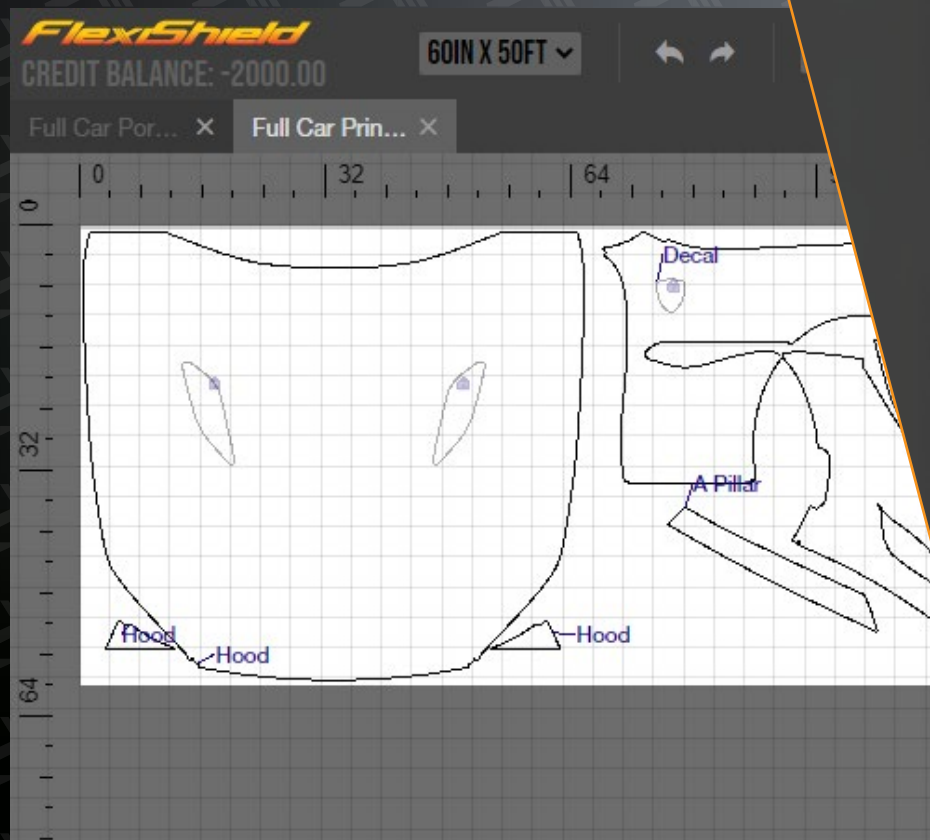

FlexiShield
CREDIT BALANCE: -2000.00

Search car, car model, manufacture

AMERICA



EXTERIOR

718



Panamera



XIX 3D ZenoX

Help your customers decide with a stunning preview of their FlexiShield Cosmetic PPF project

FlexiShield has partnered up with XIX 3D to carry a fully updated catalogue of the nearly 100 FlexiShield Cosmetic PPF colors on their ZenoX platform. For a small monthly subscription fee this will allow you to show your customers live still and animated renderings of various color combinations, under different light conditions, and against realistic background environments.

Cosmetic PPF protection is an important investment, and a long-term style decision for your customers. It shouldn't be left entirely to their imagination. Help them decide, and support your sales process, with ZenoX & FlexiShield!




Help your customers visualize their projects.



Real-time rendering with thousands of customization options.



Thousands of high-resolution car models and dozens of environments.

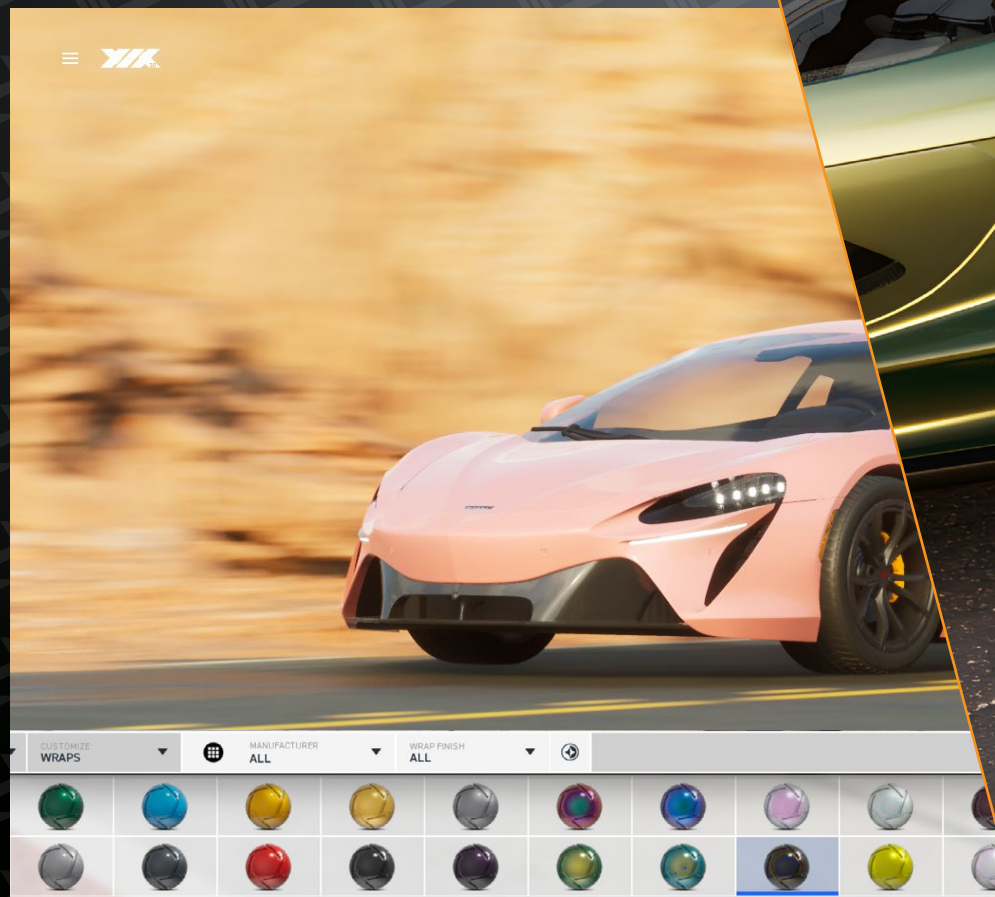

INSTALLATION & MARKETING TOOLS

Stand out from the crowd!

FlexiShield's comprehensive suite of tools, marketing material, and shop equipment revolutionizes paint protection film installation. With precision-cut templates and specialized application tools, achieving flawless installations becomes effortless.

Our marketing materials showcase the durability and clarity of FlexiShield's film, bolstering customer confidence. From precision knives to custom-designed workstations, we empower professionals to deliver an unparalleled customer experience.

FlexiShield's commitment to innovation sets the industry standard, equipping installers with the tools they need to exceed expectations and protect vehicles with confidence.



Application and detailing tools for the full FlexiShield product range.




Marketing and promotional material.



Shop and event decorations and visuals.

FlexiShield Marketing Materials




Men's Polo Shirt
Represent FlexiShield with style and class in this black polo with subtle stripes and accents.
Black, polyester, ytted sleeves,
available in men's sizes.

\$19.99



Women's V-Neck Shirt
Wear FlexiShield casually, around the shop installing, or anywhere else.

\$14.99



Work Jacket
Time to get to work! This jacket is perfect for anything, but especially for comfort and protection while on the job.
Yellow & black, cotton, available in men's sizes.

\$34.99



PRO 1/4 Zip
Keep warm, be comfortable, look stylish and promote FlexiShield PPF in this 1/4 zip pullover.

\$34.99

Windbreaker Jacket
A slick, light jacket for those mornings in the shop or at the gym.
Black, nylon mix, available

\$45.99

AFTERCARE

7 days after installation:

- Do not wash your car.
- Do not use towels to wipe the film, particularly avoid wiping along the edges of the film.
- Do not use high-pressure water sprayers to rinse the film.

Within 3 days after installation:

- Do not drive over 50 MPH or 80 km/h.

After-care instructions:

It is normal if there is some residual water under the film after installation. Within 15-30 days the water will have evaporated. Parking your car under direct sunlight will help accelerate the drying process.

After installing FlexiShield PPF, avoid using strong acids or alkalis to clean the PPF. Failure to do so could reduce gloss over time.

FlexiShield has self-healing and water-repelling properties. However, this does not ensure that the film will not be damaged under extreme conditions. Bird droppings and dead bugs on the film should be washed within 72 hours to avoid any residual penetration into the film.

If you find film edge lifting or water/air bubbling, contact the installation shop for professional advice. Do not cut or peel the film yourself.

Avoid using low quality, microfiber cloths that could leak color and stain PPF film.



Limited Warranty and Limited Remedy:

Reflek Technologies Corporation's extensive warranty certifies FlexiShield paint protection film and window film lines to be free of any manufacturing and workmanship defects for the periods described below, and from the date of installation on painted automotive surfaces. This warranty covers only those defects which can be attributed to the manufacturing process of the film such as fading, color change, cracking, bubbling, or delamination.

- FlexiShield DPH & WSH-Pro: Twelve (12) years.
- FlexiShield WSH: Ten (10) years.
- FlexiShield MAT & STH: Eight (8) years.
- FlexiShield BHP: Seven (7) years.
- FlexiShield Cosmetic PPF. On painted Automotive surfaces, this warranty covers, for a period of:
 - Five (5) years* against colour fading or discolouration.
 - Ten (10) years against yellowing, cracking, bubbling, or delamination
- * Based on 5 years of field testing (up to early 2025) and 5-years-equivalent of laboratory Accelerated UV testing, showing a colour change below 0,8% compared to the baseline.
- FlexiShield HDL: Thirty-six (36) months.
- FlexiShield DFR Pro: Twelve (12) months.
- FlexiShield Window Films: Life-time.

This warranty does not cover FlexiShield products installed on vehicles used for commercial or professional activities, including but not limited to racing cars, courier fleets, rentals, houseboats, or yachts.

Marine applications:

Due to the additional wear and deterioration caused by fresh and salt water on maritime applications FlexiShield's manufacturer warranty for **above the waterline** and (marine) interiors use is five (5) years for DPH, WSH and WSH Pro, and three (3) years for STH, MAT, and Cosmetic PPF.

For full warranty information and conditions please visit:
www.FlexiShieldUSA.com or www.FlexiShieldEU.com

WARRANTY

FlexiShield

Paint Protection Film

FlexiShield EU Regional Office & Distribution

+31 6 3458 3582

www.FlexiShieldEU.com
salesEU@reflekttech.com

Marconistraat 70H
Gouda 2809PE
The Netherlands

FlexiShield USA HQ & Manufacturing

+1 (866) 312 9909

www.FlexiShieldUSA.com
contact@reflekttech.com

280 N Roosevelt Ave
Chandler AZ 85226
United States of America

FlexiShield ME&NA Regional Office & Distribution

+971 55 650 1493

www.FlexiShieldME.com
salesME@reflekttech.com

WH 36/D 06 ABA Avenue
Al Qouz Industrial Area 02. Dubai
United Arab Emirates

COVERAGE YOU CAN COUNT ON!

A brand of:

